


LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECR-06-017533	25JUL06	JWD	JD

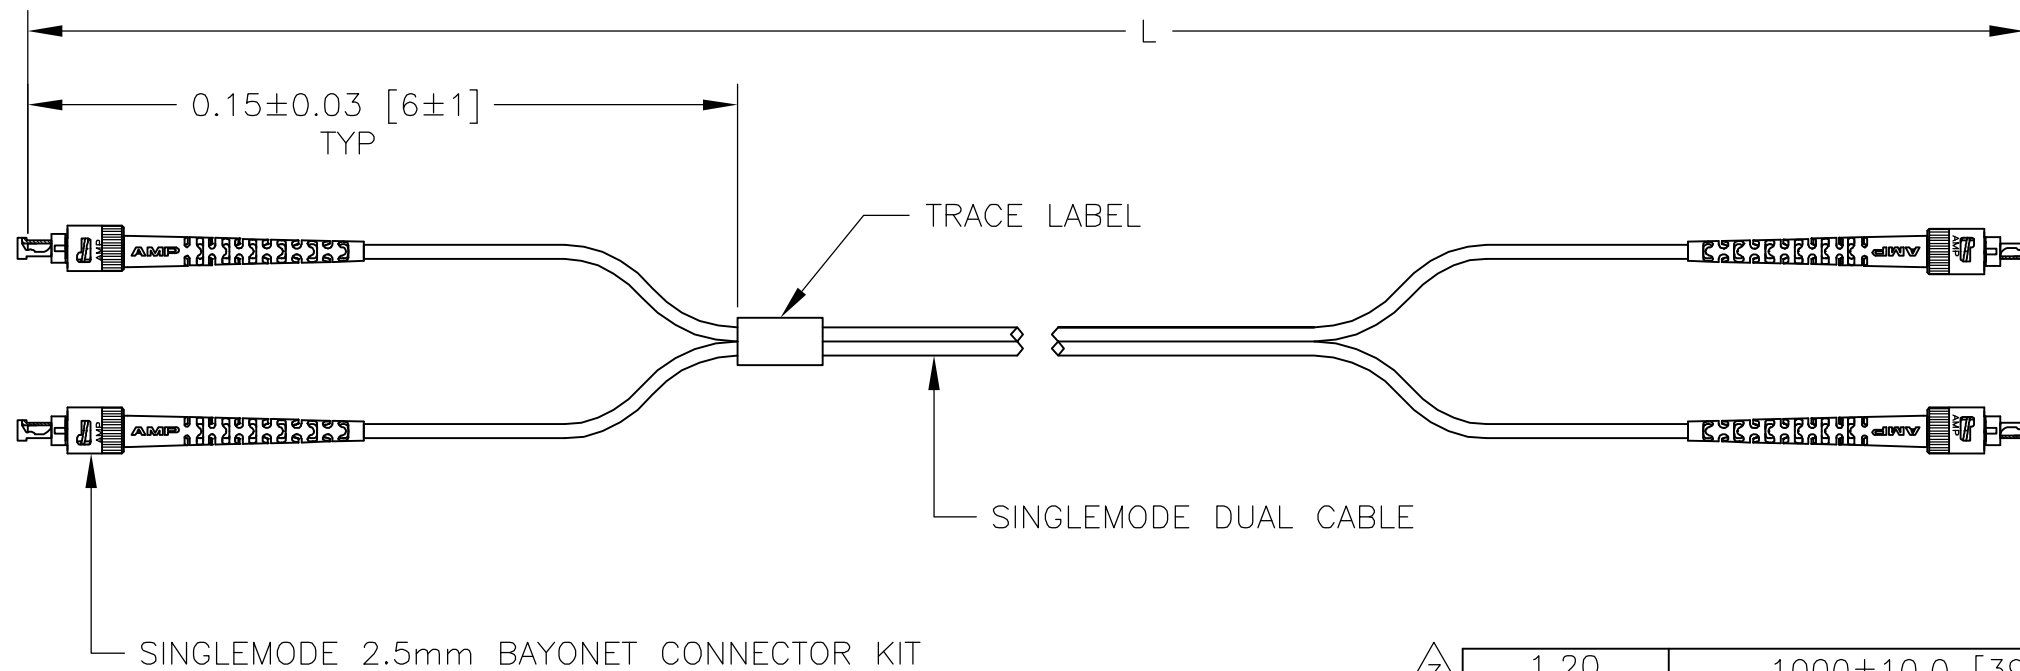

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
- 2. 55dB MINIMUM RETURN LOSS.
- 3 2 METERS OF INSIDE CABLE END EXPOSED FROM SPOOLED CABLE
- 4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

3	1.20	1000±10.0 [39370±394]	2-5503162-3
	0.50	4.5±0.08 [177±3]	1-5503162-8
	0.50	1.5±0.05 [59±2]	1-5503162-7
	0.52	30±0.30 [1181±12]	1-5503162-4
	0.51	15±0.15 [590±6]	1-5503162-1
	0.51	10±0.15 [394±6]	1-5503162-0
	0.51	9±0.15 [354±6]	5503162-9
	0.51	8±0.15 [315±6]	5503162-8
	0.50	7±0.08 [275±3]	5503162-7
	0.50	6±0.08 [236±3]	5503162-6
	0.50	5±0.08 [197±3]	5503162-5
	0.50	4±0.08 [157±3]	5503162-4
	0.50	3±0.05 [118±2]	5503162-3
	0.50	2±0.05 [79±2]	5503162-2
	0.50	1±0.05 [39±2]	5503162-1
	MAX IL (dB)	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C.S.VASU	14 NOV 05	<b>tyco</b> Electronics	Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
DIMENSIONS: METERS [INCHES]		CHK	J.DUNCAN	14 NOV 05		NAME CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE DUAL CABLE, 2.5mm BAYONET, OPTIMATE		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J.DUNCAN	14 NOV 05	PRODUCT SPEC			
0 PLC ± -		APPLICATION SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ± -		WEIGHT		A3		00779	5503162	-
2 PLC ± -		CUSTOMER DRAWING		SCALE		NTS	SHEET	1 OF 1
3 PLC ± -								REV
4 PLC ± -								B
ANGLES ± -								
FINISH								