

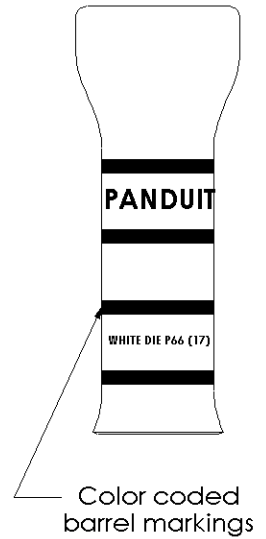


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size & Type	Stranded Copper Flex Cable; 262.2 kcmil (650/24) Diesel Locomotive, 250 kcmil Class K & Class M
Wire Strip Length	2-5/16 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	WHITE
Panduit Die Index No. on Barrel	P66
Alternate Industry Die Index No. ( ) on Barrel	(17)

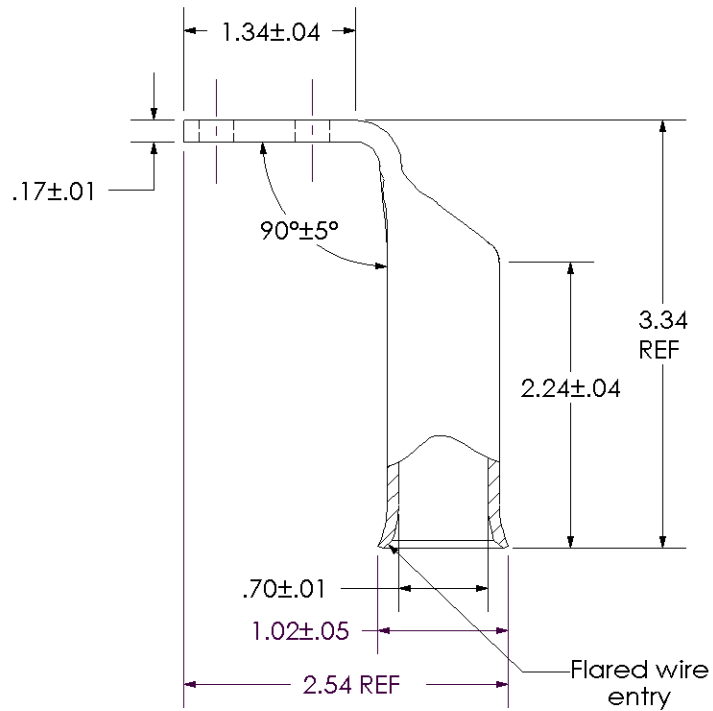

LISTED Wire Connector

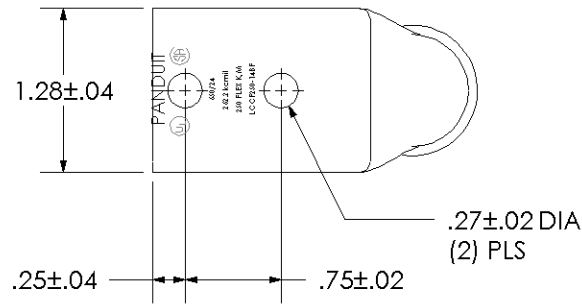

00	9/02	SAB	DRL
REV	DATE	BY	CHK

RELEASED

DESCRIPTION

10338

ECN

SCALE N/A

DRAWING NO / CAD FILE

LCCF250-14BF-CUST

**PANDUIT CORP. TINLEY PARK, ILLINOIS**

LCCF250-14BF-X  
Copper Lug - Two-Hole, Flared Barrel, 90° Angle Tongue