


PACKAGE: INDIVIDUAL PE BAG.


NOTE FOR PLUG:
MATERIAL: HOUSING-POLYCARBONATE, CLEAR.
TERMINAL-0.36[.014] THICK PHOSPHOR BRONZE.
THICK GOLD IN LOCALIZED GOLD PLATE.
AREA, GOLD FLASH OVER THE REMAINDER.
OVER 2.54um[.000100] THICK NICKEL
UNDERPLATE.

CONDUCTOR: [26AWG (0.16/7) BARE COPPER] X6C
 INSULATION: [PP6331 ID: 0.95 ± 0.03] X6C
 JACKET: PVC NOUL 65P

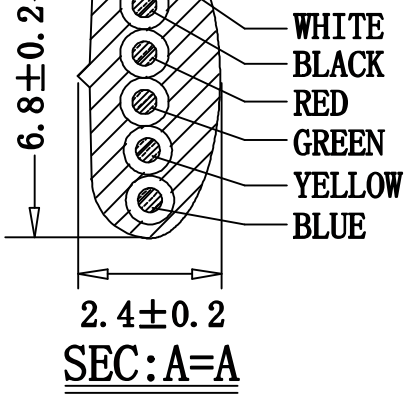


| P1 | P2 |
|----------|----|
| 1 WHITE | 1 |
| 2 BLACK | 2 |
| 3 RED | 3 |
| 4 GREEN | 4 |
| 5 YELLOW | 5 |
| 6 BLUE | 6 |

| NO | ITEM | DESCRIPTION | Q'TY |
|----|-----------|-------------|------|
| ① | CABLE | | 1PCS |
| ② | PLUG | 6P6C 50U" | 2PCS |
| ③ | CABLE TIE | | 1PCS |
| ④ | | | |
| ⑤ | | | |
| ⑥ | | | |



A, B, C, D. Folding



E, F, G. Folding

| PART NO | DRAWING NO | WIRE LENGTH "L" | BUYER COLOR | VENDOR COLOR | CUT LENGTH |
|----------------------|------------|--------------------|-------------|--------------|-------------|
| 512-26-6600-WH-0005F | A | 1525 ± 20 (5FT) | White | W-103 LIGHT | 1525-1535MM |
| 512-26-6600-WH-0007F | B | 2135 ± 30 (7FT) | White | W-103 LIGHT | 2135-2145MM |
| 512-26-6600-WH-0010F | C | 3050 ± 60 (10FT) | White | W-103 LIGHT | 3050-3060MM |
| 512-26-6600-WH-0012F | D | 3660 ± 60 (12FT) | White | W-103 LIGHT | 3660-3670MM |
| 512-26-6600-WH-0014F | E | 4270 ± 60 (14FT) | White | W-103 LIGHT | 4270-4280MM |
| 512-26-6600-WH-0025F | F | 7625 ± 100 (25FT) | White | W-103 LIGHT | 7625-7635MM |
| 512-26-6600-WH-0050F | G | 15250 ± 150 (50FT) | White | W-103 LIGHT | 15250-15260 |

| REVISED | VERSION | BASIS | CONTENTS |
|----------|---------|--------|-------------|
| 12-02-20 | A/0 | T0210A | NEW DRAWING |
| | | | |
| | | | |

| | |
|---|----------------------|
| CnC Tech, LLC Industrial Cable and Connector Technology | |
| IDRAWING NO: 671-321 | CUSTOMER: L-671 |
| ITEM NO: 6C LINE CORD P+P PLUG | UNIT: mm |
| DATE: 202-02-20 | ISSUE (A/0) |
| DRAWN: _____ | QA: _____ |
| SALES DEPT: _____ | SALES MANAGER: _____ |