

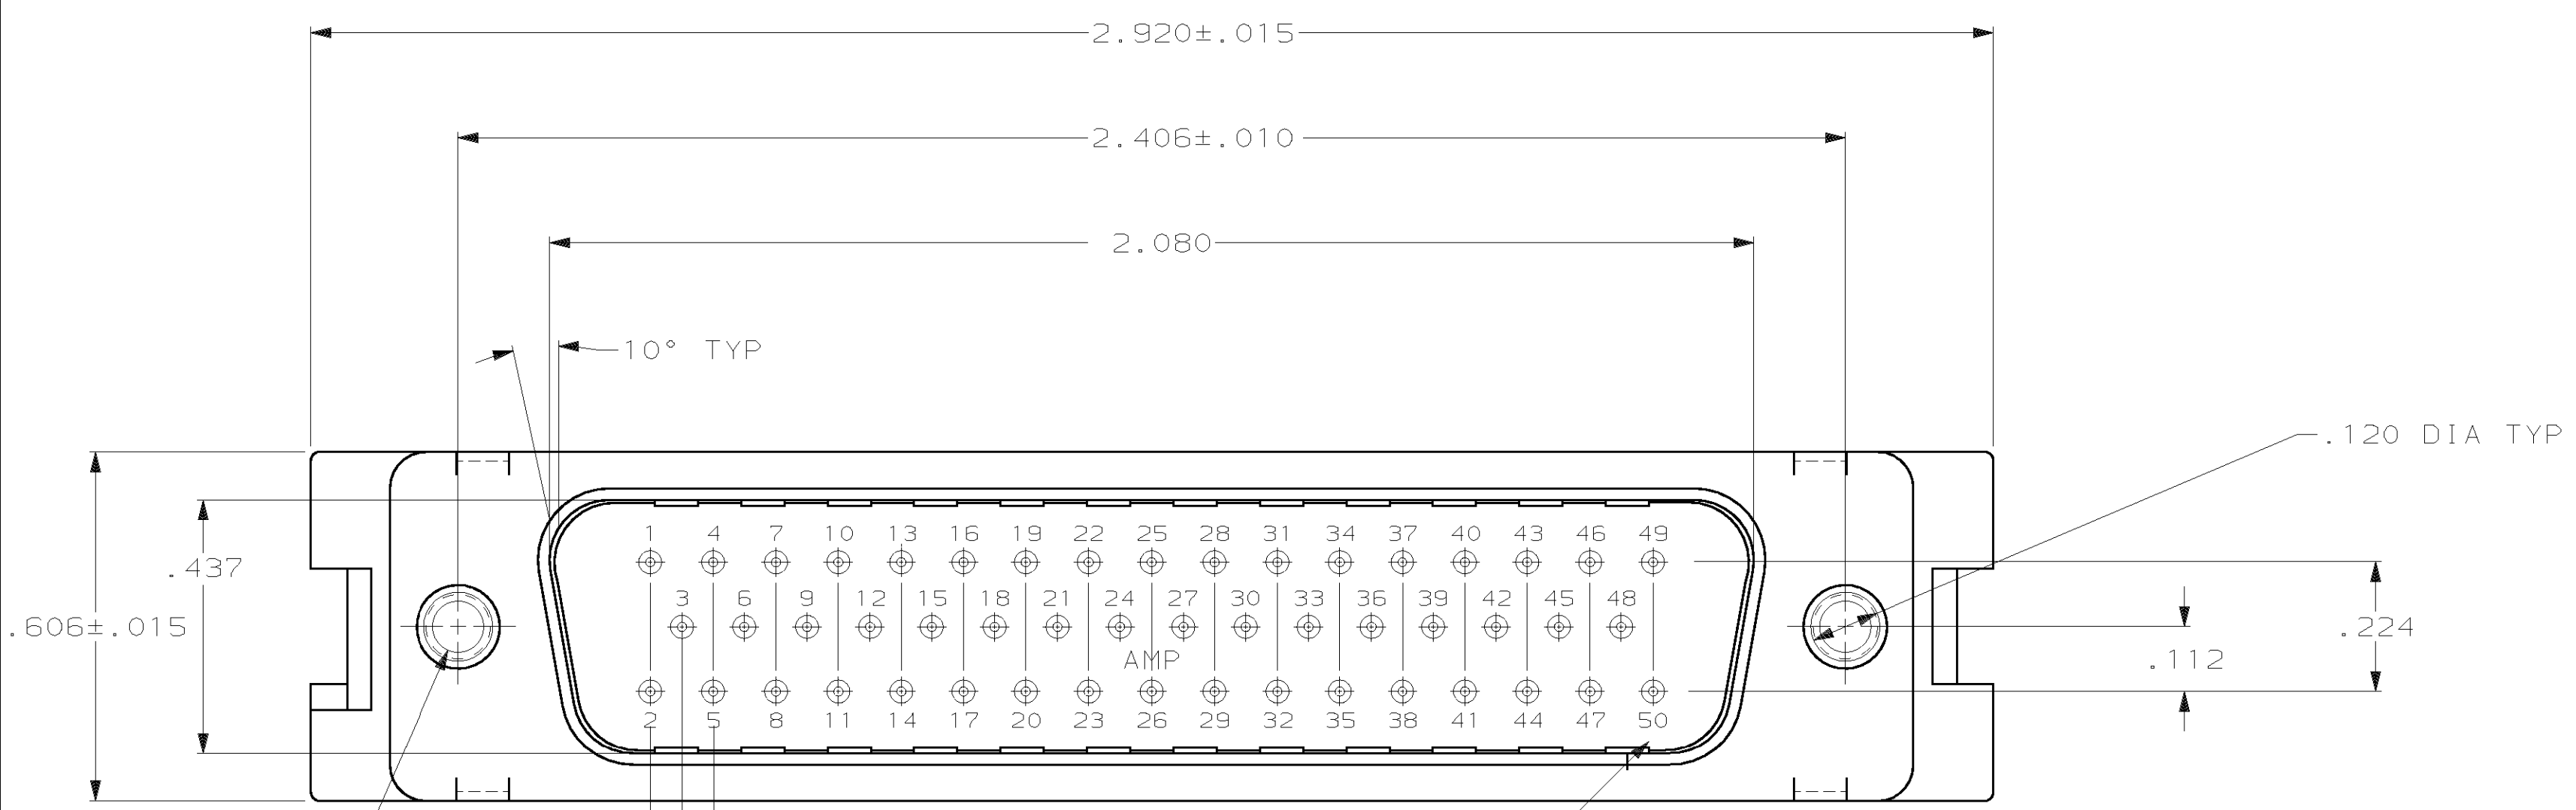
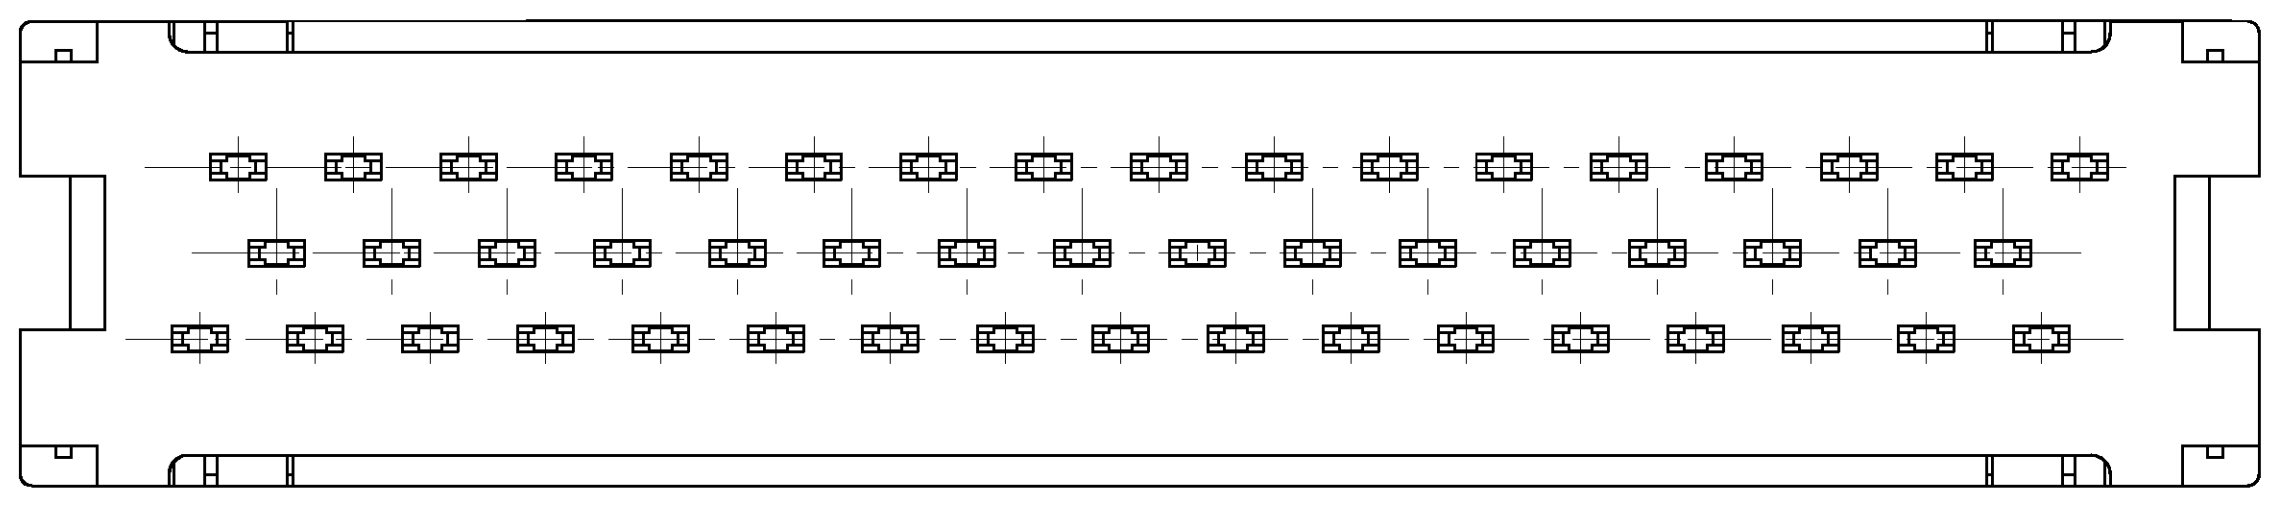
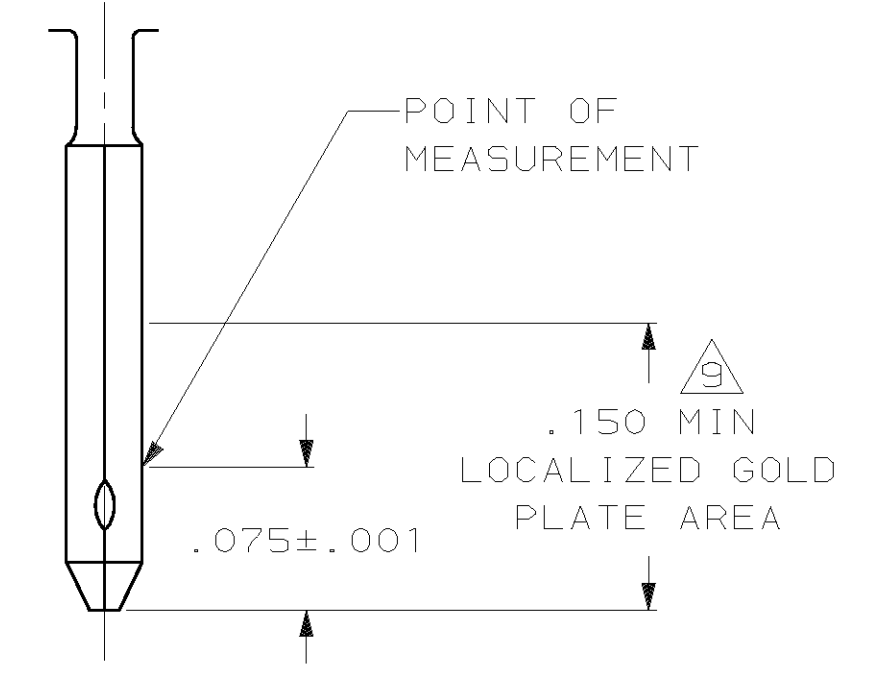


REVISIONS						
P	F	ZONE	LTR	DESCRIPTION	DATE	APPROVED
			O	RELEASED		
			A	REV PER ECN BD2519	10-88	JS
			B	REV PER ECN BD4356	9-19-90	-
			C	REV PER EC 0020-0861-93	07/23/93	SG
			D	REV PER EC 051A-0335-00	250CT00	CR

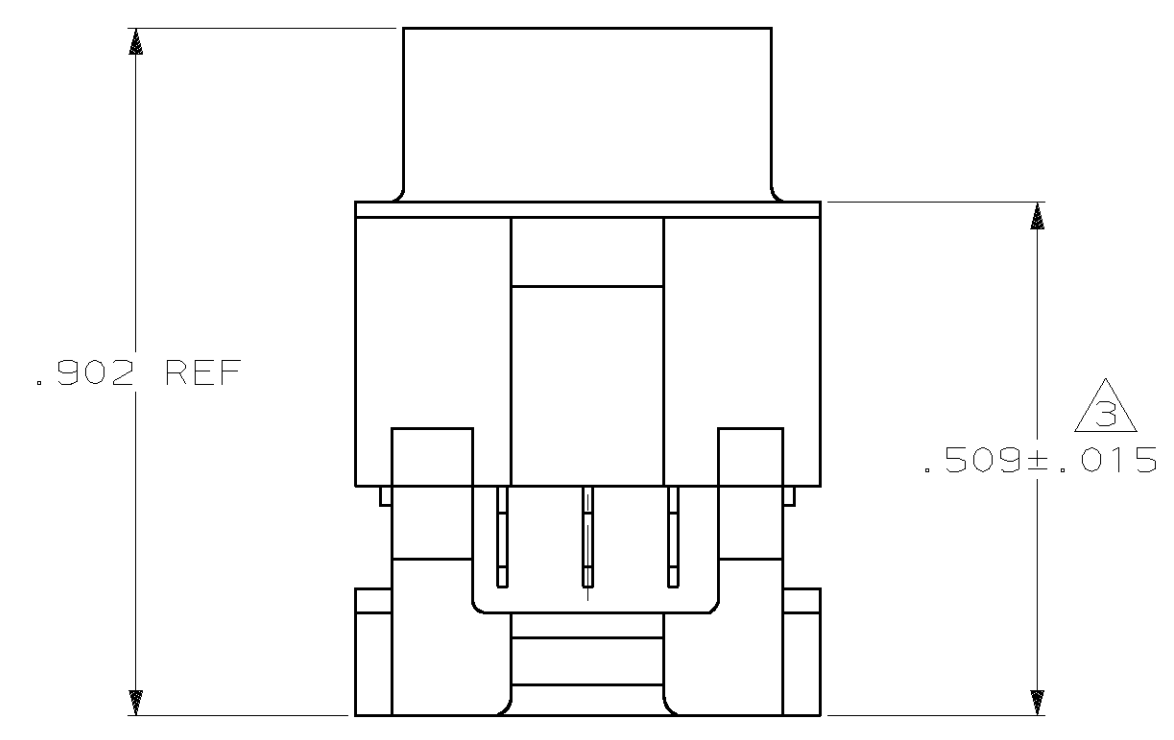

- CONNECTORS COMPLY WITH AMP SPEC 108-40012.
 - CONNECTOR DESIGNED FOR 28 AND 26 AWG STRANDED AND SOLID CONDUCTOR RIBBON CABLE ON $.050 \phi$. DIMENSION APPLIES TO TERMINATED CONNECTOR.
- $\triangle 3$ MOLDED PARTS: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; COLOR: BLACK.
 $\triangle 4$ STEEL PER QQ-S-698.
 $\triangle 5$ PH BRZ PER QQ-B-750.
 $\triangle 6$ GOLD PLATING PER MIL-G-45204, BRIGHT TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290.
 $\triangle 7$ BRIGHT TIN PLATED.
 $\triangle 8$.000030 GOLD ON MATING END, .000100 - .000200 BRIGHT TIN LEAD ON TERMINATION END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
 $\triangle 9$ THE MAX SCREW PENETRATION INTO THE CONNECTOR = .312.
 $\triangle 10$

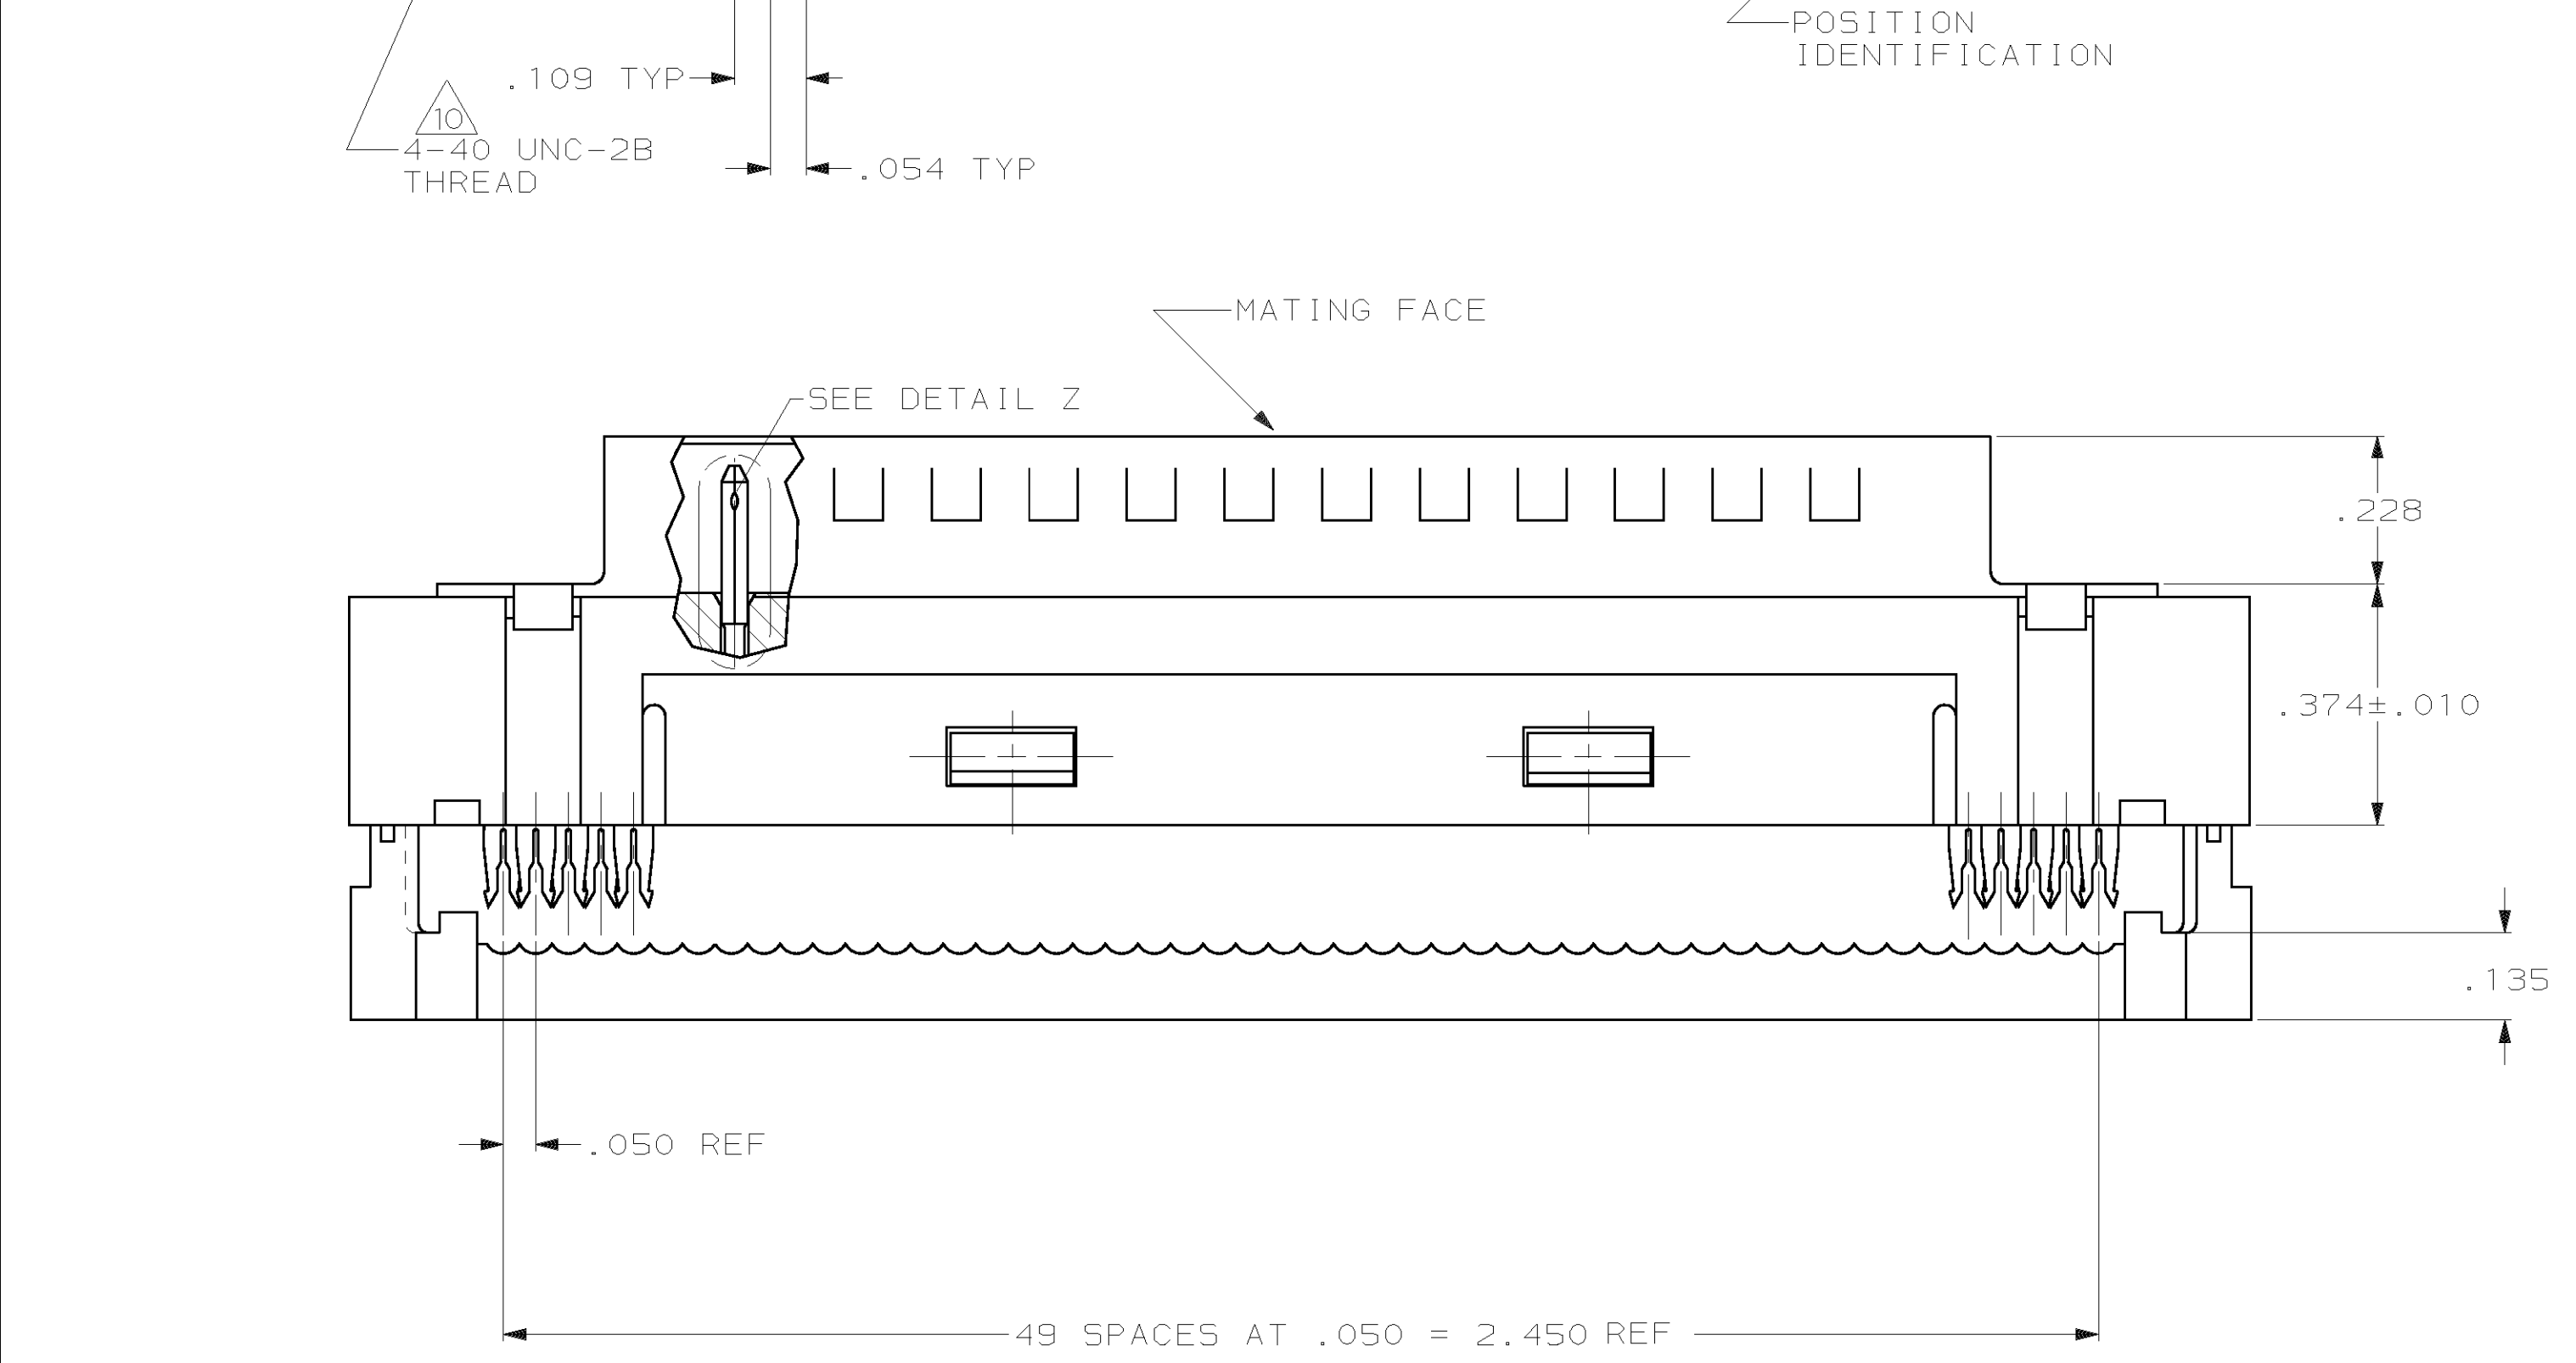

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS $\pm .005$ ANGLES $\pm 2^\circ$		CONTRACT NO DR 2-10-86 J. PEACHEY		AMP INCORPORATED Harrisburg, Pa.	
MATERIAL MOLDED PARTS: $\triangle 4$ SHELL: $\triangle 5$ CONTACTS: $\triangle 6$		CHK 2-10-86 B. WOLFE		NAME PLUG ASSY, 50 POSN LOW	
FINISH SHELL: $\triangle 7$ CONTACTS: $\triangle 8$		APPD 2-10-86 S. GOOD APPD 2-11-86 D. HOFFMAN		PROFILE HDF, FRONT METAL SHELL, W/PRE-ASSEMBLED COVER, AMP-LATCH	
OTHER APPD		SIZE D	FSCM NO 00779	DRAWING NO 746790	PART NO 746790-1
SCALE NTS		SHEET 1 OF 1		CUSTOMER DRAWING	