


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

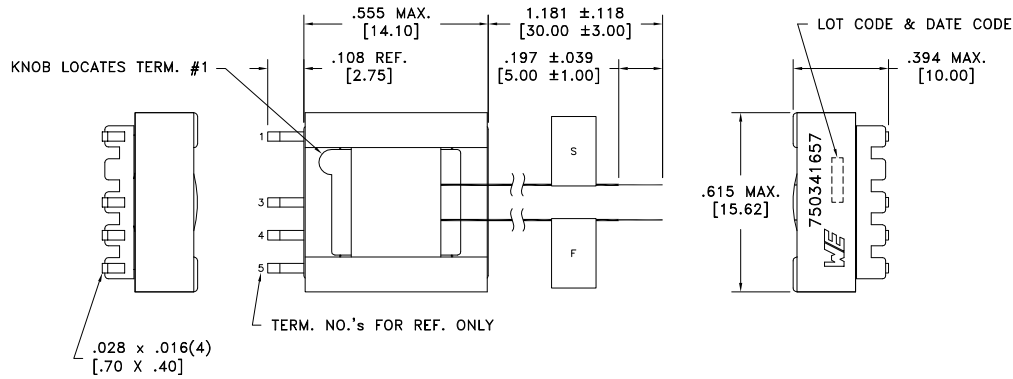

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-1	@20°C	2.50 ohms ±10%
D.C. RESISTANCE	5-4	@20°C	0.993 ohms ±10%
D.C. RESISTANCE	S-F	@20°C	0.057 ohms ±20%
INDUCTANCE	3-1	10kHz, 1.0VAC, Ls	0.720mH ±10%
DIELECTRIC	1-S	tie(3+4), 3000VAC, 1 second	-
URNS RATIO		(3-1):(5-4)	2.84:1, ±2%
URNS RATIO		(3-1):(F-S)	13.0:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Core shorted to shield winding verified by continuity test between core and terminal #4.



Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0759 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.001 [.03]	DRAWING TITLE TRANSFORMER	PART NO. 750341657
6A	5/13	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341657	SPECIFICATION SHEET 1 OF 1