

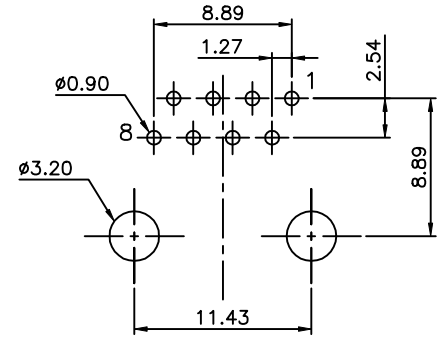



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		Drawing Modify	SYANG 4/28/98	
△		Drawing Modify	SYANG 6/19/98	
△		Drawing Modify	SYANG 7/10/98	
△		PART NO. CHANGE	RACHEL 3/3/99	
△		PART NO. CHANGE	sammy 1/13/05	
△		PART NO. CHANGE	sammy 05/09/05	
△		DEL △ △ P/N.	sammy 03/09/05	

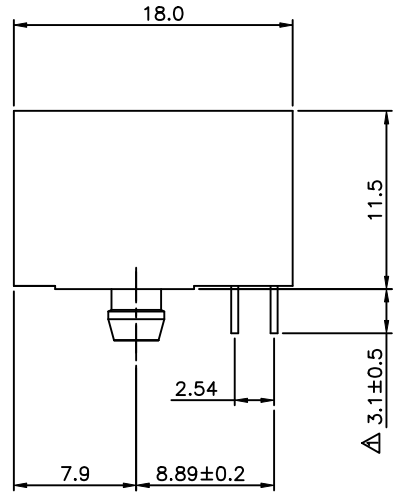

PC BOARD LAYOUT COMPONENT SIDE SHOWN

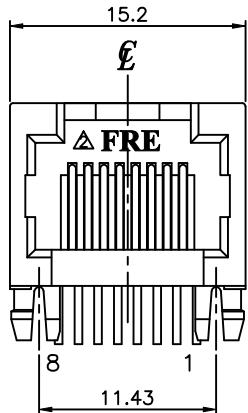

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:


- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
  - OPERATION: 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

△ △ PART NUMBER: E5A8X-3000EX

NO. OF CONTACT: 4- 4C      PLATING THICKNESS:  
 4- 4C                      1- 3u"    2- 6u"  
 8- 8C                      3-15u"   4-30u"

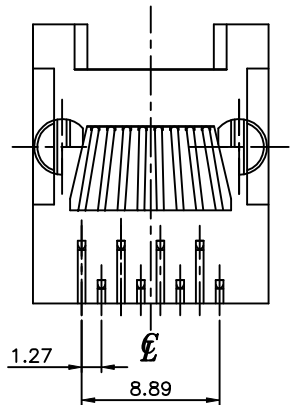

DETACHED LISTS	← MM (INCH) →		DFTO TONY	DATE 11/14/97	FULL RISE ELECTRONIC CO., LTD		
	TOLERANCES EXCEPT AS NOTED		CHKD SAMMY	DATE 2005/08/31			
	MM	±	MFO	DATE	TITLE RJ45 SIDE ENTRY PCB JACK		
	.0 ± 0.2	±	APPV LUSHENG	DATE 2005/08/31			
.00 ± 0.15	±	MATERIAL :		DRAWING NO. GE5A3002			
.000 ± 0.075	±	ANGLES ± 0.5		/PART NO. SEE NOTE			
THIRD ANGLE PROJECTION		FINISH :	SCALE : 3 : 1	DO NOT SCALE DRAWING		SIZE A3	REV 7
				SHEET OF			